

FIRBIMATIC
DRY CLEANING DIVISION

TECHNICAL INFORMATION

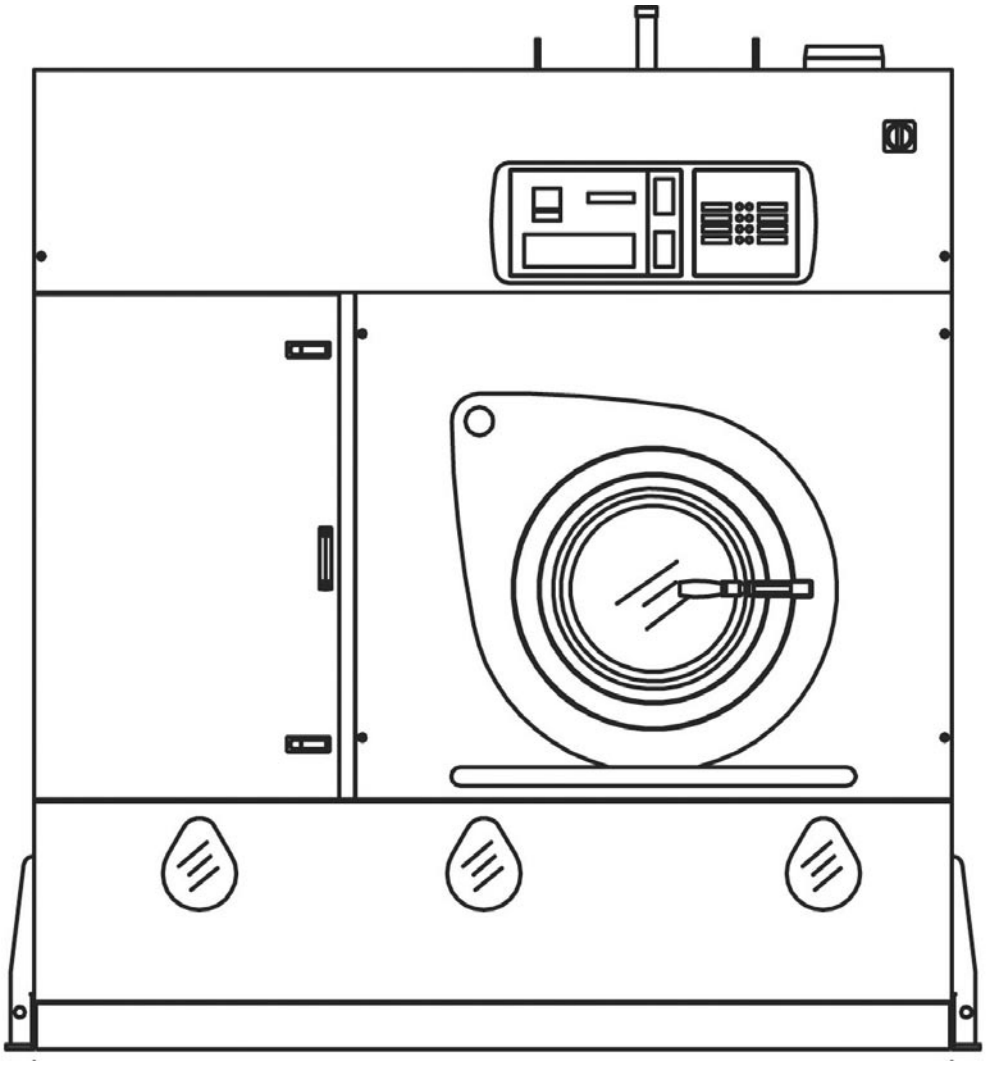

F25 LT3



WORKING MACHINE WITH SOLVENT	PERCHLORETHYLENE	
MACHINE CAPACITY	25 Kg	*55 ÷ 60 Lbs*

BASKET		
Diameter	1000 mm	*39.4 inches*
Depth	640 mm	*25.2 inches*
Volume	500 Lt	*14.1 cu.ft*
Wash speed	20 ÷ 50 rpm	
Extract speed	300 ÷ 450 rpm	
Door opening	500 mm	*20 inches*

SOLVENT TANKS		
Useful volume tank 1	160 Lt	*42 gal*
Useful volume tank 2	160 Lt	*42 gal*
Useful volume tank 3	210 Lt	*55 gal*
FLOOR SAFETY TANK CAPACITY	327 Lt	*86 gal*


STILL		
Useful volume at half inspection	190 Lt	*50 gal*
Total volume	230 Lt	*61 gal*
Boiler water capacity	5 Lt	*1.3 gal*


ELECTRIC POWER	400V - 3~50Hz		220V - 3~60Hz	
Wash - Extract (With Inverter)	*2.7-7.5 Hp	*2-5.5 Kw	*2.7-7.5 Hp*	*2-5.5 Kw*
Solvent pump motor	1 Hp	0.75 Kw	*1 Hp*	*0.75 Kw*
Fan motor	2 Hp	1.5 Kw	*3.5 Hp*	*2.65 Kw*
Refrigerator compressor	5 Hp	3.75 Kw	*5 Hp*	*3.75 Kw*
Nylon filter motor	0.75 Hp	0.55 Kw	*0.75 Hp*	*0.55 Kw*
Sludge pump (optional)	0.75 Hp	0.55 Kw	*0.75 Hp*	*0.55 Kw*
Still electric elements	-	9 Kw	-	*9 Kw*
Heater electric elements	-	9 Kw	-	*9 Kw*
Air motor compressor (optional)	0.5 Hp	0.38 Kw	-	-
Fan motor Coalperc (optional)	0.75 Hp	0.55 Kw	*0.75 Hp*	*0.55 Kw*

*** POWER CHANGES ACCORDINGLY TO THE USE OF THE MACHINE**

NOTE: Acoustic emission level of the machine is lower than 70 dB (A)


FILTRATION AVAILABLE IN THIS MODEL


ONE NYLON FILTER			
	Volume nylon filter housing	**55 Lt**	*14,5 gal*
	Nylon filter area	**3,9 mt²**	*42 ft²*
	Filter disks	**26 nr**	


ONE NYLON FILTER AND ONE LARGE CARTRIGDE - KR			
	Volume nylon filter housing	**55 Lt**	*14,5 gal*
	Nylon filter area	**3,9 mt²**	*42 ft²*
	Filter disks	**26 nr**	
	Vol. large cartridge housing KR	**55 Lt**	*14,5 gal*
	Area large cartridge KR	**2,6x2=5,2 mt²**	*28x2=56 ft²*
	Cartridges quantity KR	**nr 2**	

TWO NYLON FILTER			
	Volume nylon filter housing	**55x2=110 Lt**	*137.4 gal*
	Nylon filter area	**3,9x2=7,8 mt²**	*42x2=84 ft²*
	Filter disks	**26x2=52 nr**	


ONE NYLON FILTER AND ONE DECOLORATING FILTER PR			
	Volume nylon filter housing	**55 Lt**	*14,5 gal*
	Nylon filter area	**3,9 mt²**	*42 ft²*
	Filter disks	**26 nr**	
	Decolorating housing volume PR	**13 Lt**	*3,4 gal*
	Decolorating cartridges	**1 nr**	
	Decolorating cabon quantity	**2 kg**	*4,4 Lbs*


ONE NYLON ONE CARTRIDGE -KR ONE DECOLORATING			
	Volume nylon filter housing	**55 Lt**	*14.5 gal*
	Nylon filter area	**3,9 mt²**	*42 ft²*
	Filter disks	**26 nr**	
	Vol. large cartridge housing KR	**55 Lt**	*14.5 gal*
	Area large cartridge KR	**2,6x2=5,2 mt²**	*28x2=56 ft²*
	Cartridges quantity KR	**nr 2**	
	Decolorating housing volume	**13 Lt**	*3.4 gal*
	Tubes	**1 nr**	
	Decolorating cartridges	**1 nr**	
	Decolorating cabon quantity	**2 kg**	*4.4 Lbs*


TWO NYLON FILTERS AND ONE DECOLORATING FILTER			
	Volume nylon filter housing	**55x2=110 Lt**	*137.4 gal*
	Nylon filter area	**3,9x2=7,8 mt²**	*42x2=84 ft²*
	Filter disks	**26x2=52 nr**	
	Decolorating housing volume	**13 Lt**	*3.4 gal*
	Tubes	**1 nr**	
	Decolorating cartridges	**1 nr**	
	Decolorating cabon quantity	**2 kg**	*4.4 Lbs*

TWO NYLON FILTER AND TWO DECOLORATING FILTER			
	Volume nylon filter housing	**55x2=110 Lt**	*137.4 gal*
	Nylon filter area	**3,9x2=7,8 mt²**	*42x2=84 ft²*
	Filter disks	**26x2=52 nr**	
	Decolorating housing volume	**13x2=26 Lt**	*3.4x2=6.8 gal*
	Tubes	**2 nr**	
	Decolorating cartridges	**2 nr**	
	Decolorating cabon quantity	**4 kg**	*8.8 Lbs*

DIMENSIONS AND WEIGHTS

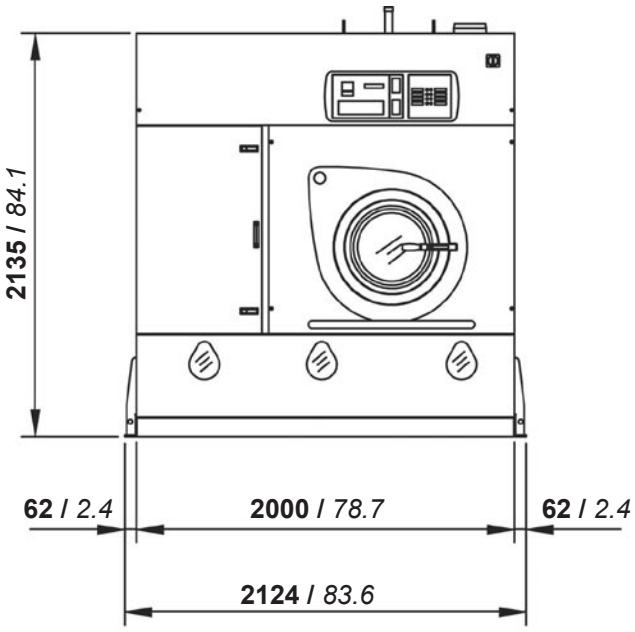

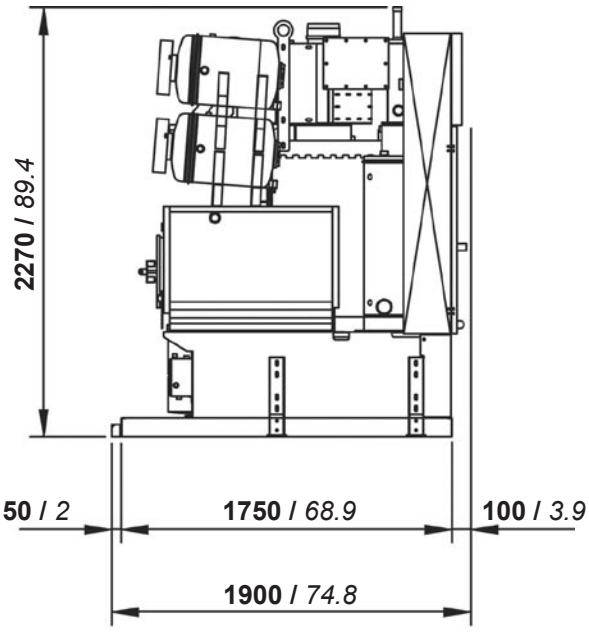

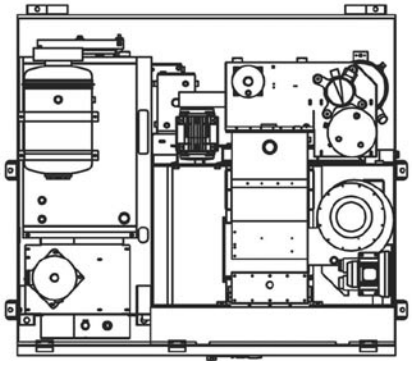


mm / *inches*

CHARGES - STANDARD VERSION		
Empty machine weight	**2000 Kg**	*4409 Lbs*
Machine weight with solvent	**2688 Kg**	*5926 Lbs*
Static charge on the floor with solvent	**768 Kg/m²**	*157 Lbs/ft²*
Dynamic charge on the floor (+10%)	**1117 Kg/m²**	*229 Lbs/ft²*

CHARGES - PLUS VERSION		
Empty machine weight	**2100 Kg**	*4630 Lbs*
Machine weight with solvent	**2788 Kg**	*6146 Lbs*
Static charge on the floor with solvent	**797 Kg/m²**	*163 Lbs/ft²*
Dynamic charge on the floor (+10%)	**1150 Kg/m²**	*236 Lbs/ft²*


PACKAGED MACHINE DIMENSIONS AND WEIGHTS

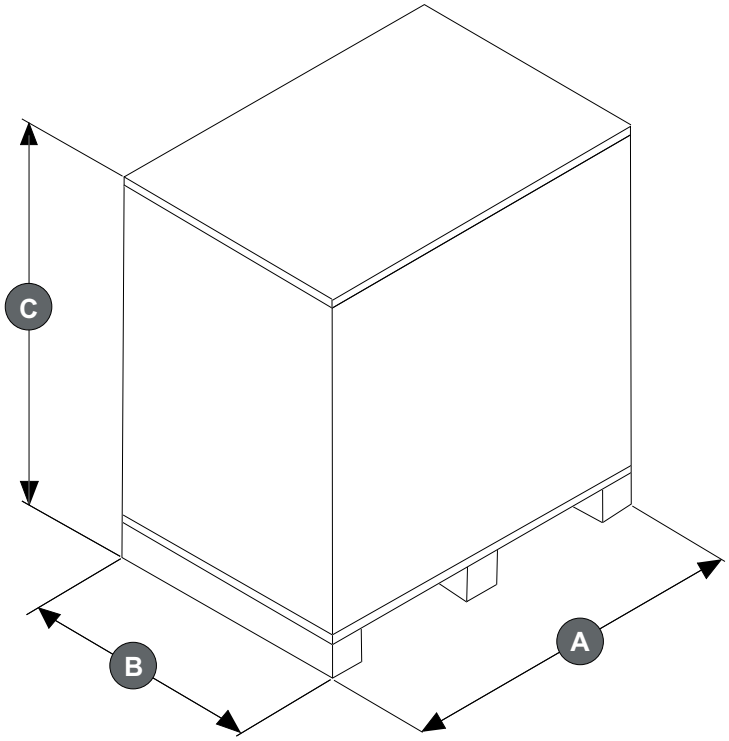


PACKAGED MACHINE DIMENSIONS							
Machine type		Carton		Wooden cage		Wooden case	
Standard	**A**	**- mm**	*- inches*	**- mm**	*- inches*	**- mm**	*- inches*
	B	**- mm**	*- inches*	**- mm**	*- inches*	**- mm**	*- inches*
	C	**- mm**	*- inches*	**- mm**	*- inches*	**- mm**	*- inches*
Plus	**A**	**- mm**	*- inches*	**- mm**	*- inches*	**- mm**	*- inches*
	B	**- mm**	*- inches*	**- mm**	*- inches*	**- mm**	*- inches*
	C	**- mm**	*- inches*	**- mm**	*- inches*	**- mm**	*- inches*

PACKAGED MACHINE WEIGHTS						
Machine type	Carton		Wooden cage		Wooden case	
Standard	**- Kg**	*- Lbs*	**- Kg**	*- Lbs*	**- Kg**	*- Lbs*
Plus	**- Kg**	*- Lbs*	**- Kg**	*- Lbs*	**- Kg**	*- Lbs*


FIXING POINTS



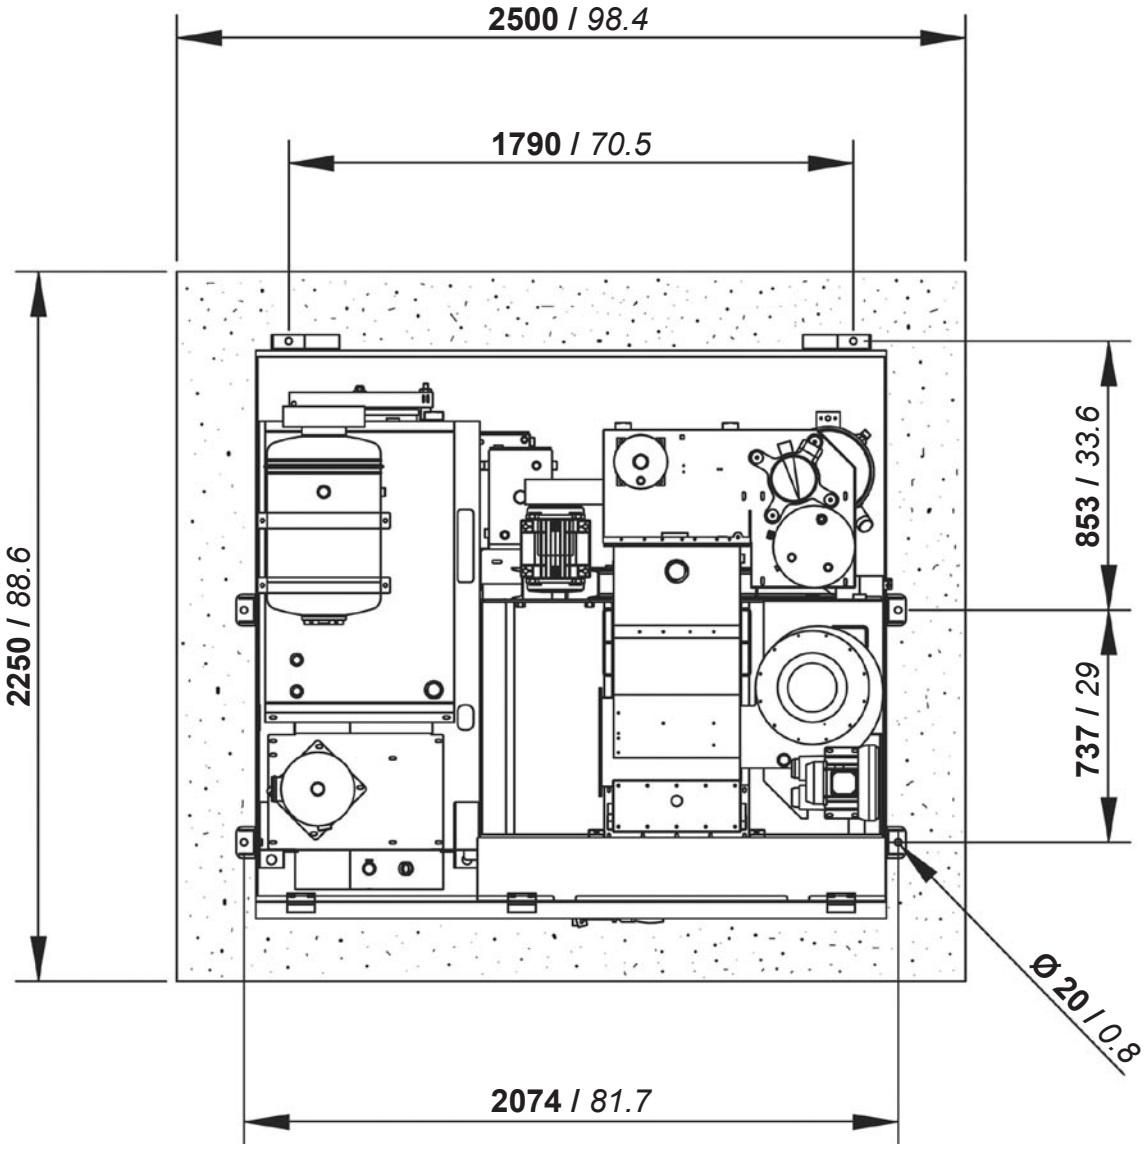

mm / *inches*

CONNECTIONS

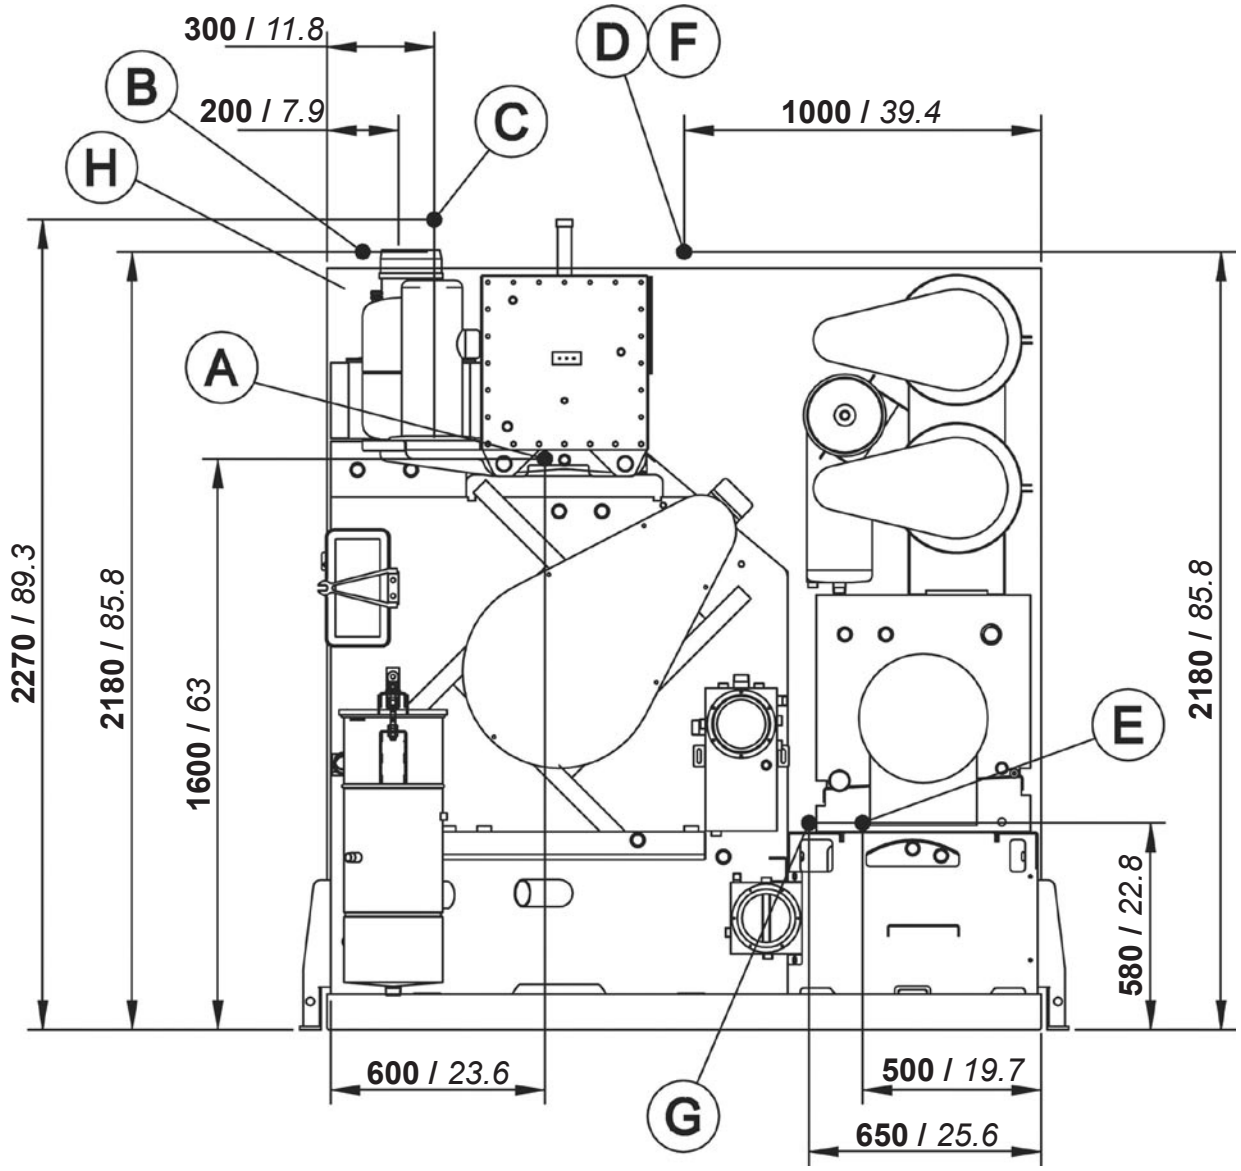

mm / *inches*

A	Compressed air inlet	**Ø 6mm**	*Ø 1/4”*
B	Water inlet	**Ø 3/4”**	
C	Water outlet	**Ø 3/4”**	
D	Steam still inlet	**Ø 1/2”**	
E	Condensate still outlet	**Ø 1/2”**	
F	Steam heater inlet	**Ø 1/2”**	
G	Condensate heater outlet	**Ø 1/2”**	
H	Electric connection		

SOLVENT TYPE	PERCHLOROETHYLENE			
NECESSARY QUANTITY OF SOLVENT TO FILL THE MACHINE				
Machine version - without Filters	**530 Lt**	**848 Kg**	*140 gal*	*1870 Lbs*
Machine version - 1 Nylon Filter	**585 Lt**	**936 Kg**	*155 gal*	*2064 Lbs*
Machine version - 1 Nylon Filter + 1 KR	**598 Lt**	**957 Kg**	*158 gal*	*2110 Lbs*
Machine version - 2 Nylon Filters	**640 Lt**	**1024 Kg**	*169 gal*	*2258 Lbs*
Machine version - 1 Nylon Filter + 1 Deco	**640 Lt**	**1024 Kg**	*169 gal*	*2258 Lbs*
Machine version - 1 Nylon Filter + 1 KR + 1 Deco	**653 Lt**	**1045 Kg**	*173 gal*	*2304 Lbs*
Machine version - 2 Nylon Filters + 1 Deco	**653 Lt**	**1045 Kg**	*173 gal*	*2304 Lbs*
Machine version - 2 Nylon Filters + 2 Deco	**666 Lt**	**1066 Kg**	*176 gal*	*2350 Lbs*

INFORMATION FOR THE ELECTRICAL CONNECTIONS	(400V - 3~50Hz)	
ELECTRIC Version	**26 Kw**	**47 Amp**
STEAM Version	**8 Kw**	**19 Amp**
Dissipated heat	**4875 Kcal**	

INFORMATION FOR THE ELECTRICAL CONNECTIONS	(220V - 3~60Hz)	
ELECTRIC Version	*27 Kw*	*90 Amp*
STEAM Version	*9 Kw*	*29 Amp*
Dissipated heat	*4875 Kcal*	

GENERAL INFORMATION		
Required water capacity	**Lt/min 10**	*gal/min 2.6*
Required water pressure	**bar 2 ÷ 3**	*psi 29 ÷ 44*
Required water temperature	**°C 18 ÷ 23**	*°F 65 ÷ 73*
Required air pressure	**bar 7 ÷ 8**	*psi 100 ÷ 115*
Required steam pressure (Steam Version)	**bar 4 ÷ 5**	*psi 55 ÷ 70*
Required steam availability	**Kg/h 80**	*Lbs/h 176*

All technical data are subject to change without notice.