Sankosha – Real Quality

The Ultimate Jacket Former

The Higher Standard





DF-250 Rotary Form Finisher

■ Stronger and Higher Temp. of Blower

60% bigger , 20% warmer than DF-200

Suitable for Wet Cleaning

■ Excellent Finish from XXS to XXL

Fits any sizes from female jacket to male long coat

■ The Smallest Footprint in the Category

Effective usage of factory space, yet powerful

■ Pro-environmental and Operator-friendly

Reuse circulation system of hot air non intrusive on operator


http://www.overseas.sankosha-mfg.com
Visit our web site for valuable Information
for your business expansion.

SANKOSHA MANUFACTURING CO., LTD.
988 Kanoya, Hachioji, Tokyo 193-0815, Japan
Tel: +81 42 621 1182 Fax: +81 42 620 0751


New Standard Former for Wet Cleaning



From female jacket to male long coat



Body Up/Down Function



Shoulder Width Adjustment

Just fit to silhouette
Fine adjustment available


Sleever Hanger (L) (Option)

Sleever Hanger (R) (Option)



180degree Body Rotation

For easy put on/take off

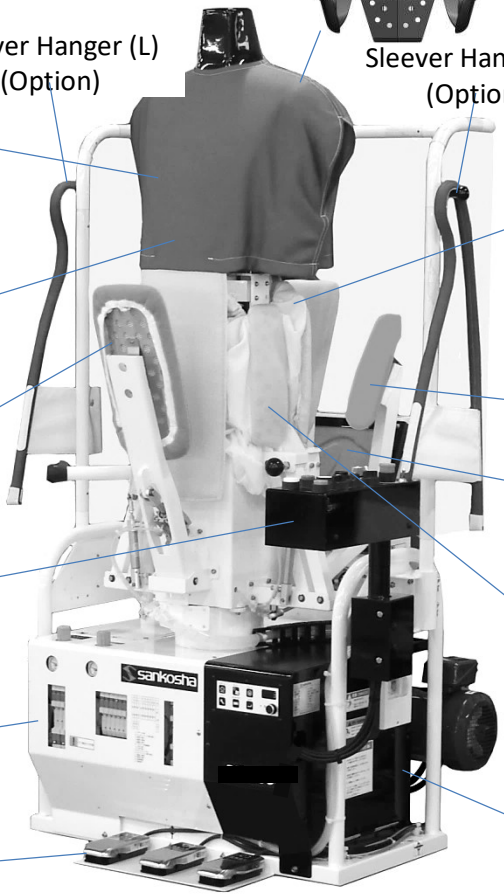

Wide-fit Body

From female XXS to male XXL
Wide range of finishing

Front Clamp Pad

Holds jacket front firm without buttons need closed

Moveable Operation Box

Angle can be adjusted by operator's optimum

Easy daily checking and maintenance

Easy-to-use foot pedals

Firm holding for side vents

Hot Air Circulation System

For energy conservation for good working environment

Side Clamp

Firm clamp of slim body – no marks
Fine adjustment available

DF-250 Rotary Form Finisher

Optional Goods

Soft Sleever

- Fits any silhouette
- No creases on sleeves
- Soft finishing with air pocket retainer
- So light and good for wide sleeves
- Long life due to light/rigid material



2 pcs come with the DF-200



Fits any silhouette


Highest Quality Safety Ratings

Specifications


	Model:	DF-200E
Power Requirement		Single phase 230V
Power Consumption		10.0 A
Air	Air Pressure	0.5 MPa
	Air Consumption	5 litre / cycle
	Air Pipe	3/8"
Steam	Steam Pressure	0.5 MPa
	Steam Consumption	12 kg / h
	Steam Pipe	In 1/2", Out 1/2"
Net Weight		160 kg
Shipping Weight		196 kg
Installed Dimensions W x D x H		1110 x 900 x 2115 mm
Carry-in Dimensions W x D x H		935 x 755 x 1565 mm
Shipping Dimensions W x D x H		1030 x 920 x 1760 mm

Design and specifications are subject to change without notice.

Footprint Comparison (Based on measurement)

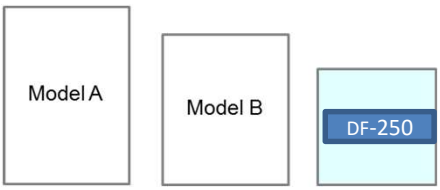


Shoulder Width

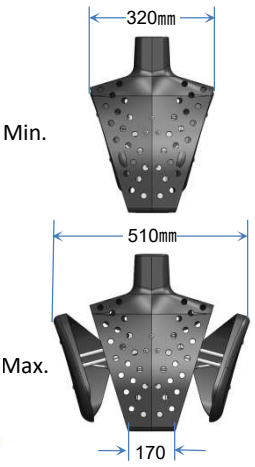


Body Rotation Mechanism

New mechanism to maintain smooth rotation



Moveable Operation Box

Angle can be adjusted by operator's optimum.



Distributed by:

sankosha
PRESS AND PROGRESS